



LED Retrofit 8.5W B22



Product Overview

LED retrofit lamps are direct replacements for conventional incandescent, halogen, and compact fluorescent (CFL) lamps.

LEDs deliver higher lumens per watt (lm/W) which means significant energy savings while lasting more than ten times longer than incandescent sources. With their directional light, instant on and ability to dim, LEDs are fast becoming the light source of choice.

Features

- Light even distribution.
- More eco-valued.
- Wider beam angle.

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in totally enclosed fittings as this will reduce lamp life.
- Do not dispose of in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

DATA SHEET

Specifications – B22 Cap

SKU	S14056
Lamp Cap	B22
Rated Power (W)	8.5W
Equivalent Wattage (W)	60
Rated Luminous Flux (lm)	806
CCT (K)	3000k
Beam Angle	180 °
Dimmable	NO
Rated Lifetime (h)	15000
Switching Cycles	> 7500
Input Voltage	220-240V~50/60Hz
Current (mA)	51
Mercury Free	YES
CRI	80
SDCM	6
Dimenesion (D*H)mm	108*60
Product Weight (g)	25
Power Factor	0.5
Starting Time (S)	<0.5
Warm-up time to 60% (S)	<1
Instant light	YES
Ambient Temperature Range (°C)	(-20°C~40°C)
Energy Label	
Energy Class	Energy Rating F
Energy Consumption (kWh/1000h)	9


* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference.

Product Markings –B22 Cap

Voltage	220-240V~50/60Hz
Nominal Power (W)	8.5W
Current (mA)	51
CE Mark	Yes
WEEE Mark	Yes
Batch Code	Yes

Dimensions

LED Retrofit 8.2W B22

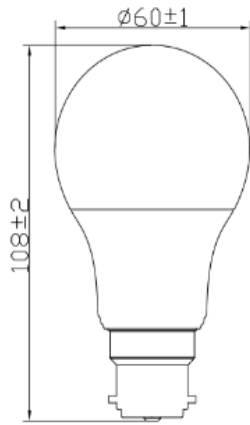

S14056

Photometric Information

3000K

