



Established 1896

# Incandescent fireglow bulb 40W 60W red A60 ,B22 Cap



## Product Overview

Main voltage incandescent lamps operate direct from the mains, without the need for a transformer, and can be dimmed: making them quick and easy to install, simple to operate and lowering installation and user costs.

## Features

- Excellent color rendering and consistency
- Reliable construction

## Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in application where voltage is unable
- This is a glass product, handle with care

## Specifications – E14, B15 Cap

SKU	S854	S855
Lamp	Cap B22	Cap B22
Nominal Power (W)	40W	60W
Voltage	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Luminous Flux (lm)	390	710
CCT (K)	1000K red	1000K red
Nominal Lifetime (h)	1000	1000
Dimmable	Yes	Yes
Switching Cycles	8000	8000
Warm-up time to 60% (S)	instant	instant
Length (mm)	105	105
Diameter (mm)	60	60
Mercury (mg)	0	0
Clean-up instructions	See website	See website
Retrofit Yes		
Equivalent Wattage (W)	40	60
Rated Power (W)	40	60
Rated Luminous Flux (lm)	390	710
Rated Lifetime (h)	1000	1000
Power Factor	1	1
Rated Peak Candelas (cd)		
Lumen Maintenance Factor at		
Nominal Lifetime	1000	1000
CRI	>80	>80
Start Time (s)	instant	instant
Ambient Temperature Range (°C)	-20 to 40	-20 to 40

## Energy Label – B22 Cap


Energy Class	F	F
Energy Consumption (kWh/1000h)	40.00 (40)*	60.00 (60)*

\* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

## Product Markings – B22 Cap

Voltage	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Power (W)	40	60
Current (mA)		
CE Mark	Yes	Yes
WEEE Mark	Yes	Yes
Batch Code	Yes	Yes

Dimensions

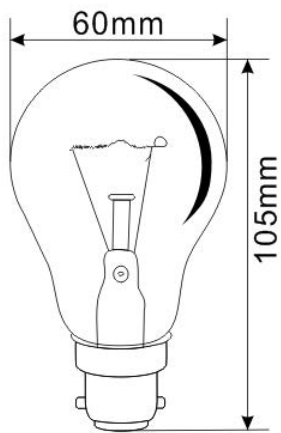

Photometric Information

1000K

