

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Cascade Holdings Ltd / INLIGHT

Supplier's address: Cascade Holdings Ltd, Gorse Street Gorse Mill, OL9 9RJ Oldham, UK

Model identifier: INL-28577

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	180 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	2,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	-
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height Width Depth	48 17 11	Spectral power distribution in the range 250 nm to 800 nm, at full-load See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	18
		Chromaticity coordinates (x and y)	0,439 0,396
Parameters for LED and OLED light sources:			
R9 colour rendering index value	37	Survival factor	0,90
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor ($\cos \phi_1$)	1,00	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4


(a) '-' : not applicable;

(b) '-' : not applicable;

4000K

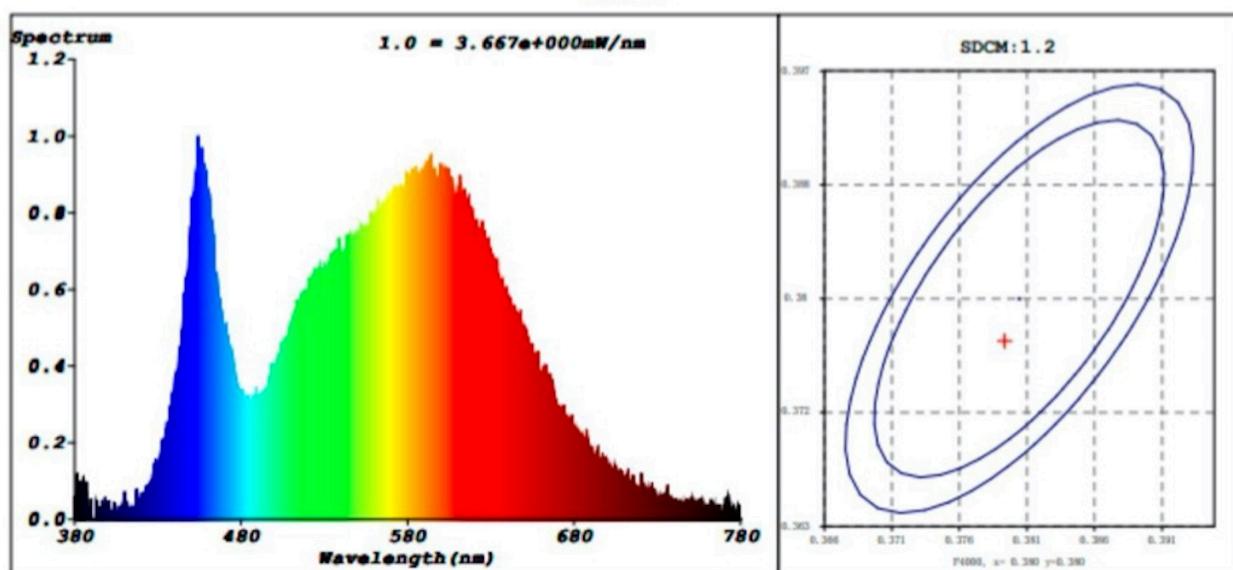

Model placed on the Union market from 21/10/2024



EPREL registration number: 2178752

<https://eprel.ec.europa.eu/qr/2178752>

Supplier: Authorised Rep Compliance Limited (Authorised representative)

Website: www.authorisedrepcompliance.com

Customer care service:

Name: Cascade Holdings Ltd

Website: <https://www.cascadehl.com/>

Email: info@cascadehl.com

Phone: +44(0)1616286622

Address:

Gorse Street Gorse Mill
OL9 9RJ Oldham
United Kingdom