



Established 1896

Incandescent appliance bulb fridge 15W clear ST22x56 ,E14,B15 Cap



Product Overview

Main voltage incandescent lamps operate direct from the mains, without the need for a transformer, and can be dimmed: making them quick and easy to install, simple to operate and lowering installation and user costs.

Features

- Excellent color rendering and consistency
- Reliable construction

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in application where voltage is unable
- This is a glass product, handle with care

Specifications – E14, B15 Cap

SKU	S874	S872
Lamp	Cap E14	Cap B15
Nominal Power (W)	15W	15W
Voltage	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Luminous Flux (lm)	100	100
CCT (K)	2700K warm White	2700K warm White
Nominal Lifetime (h)	1000	1000
Dimmable	Yes	Yes
Switching Cycles	8000	8000
Warm-up time to 60% (s)	instant	instant
Length (mm)	49	49
Diameter (mm)	22	22
Mercury (mg)	0	0
Clean-up instructions	See website	See website
Retrofit Yes		
Equivalent Wattage (W)	15	15
Rated Power (W)	15	15
Rated Luminous Flux (lm)	100	100
Rated Lifetime (h)	1000	1000
Power Factor	1	1
Rated Peak Candelas (cd)		
Lumen Maintenance Factor at		
Nominal Lifetime	1000	1000
CRI	>80	>80
Start Time (s)	instant	instant
Ambient Temperature Range (°C)	-20 to 40	-20 to 40

Energy Label – E14, B15 Cap


Energy Class	E	E
Energy Consumption (kWh/1000h)	15.00 (15)*	15.00 (15)*

* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

Product Markings – E14, B15, Cap

Voltage	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Power (W)	15	15
Current (mA)		
CE Mark	Yes	Yes
WEEE Mark	Yes	Yes
Batch Code	Yes	Yes

Dimensions

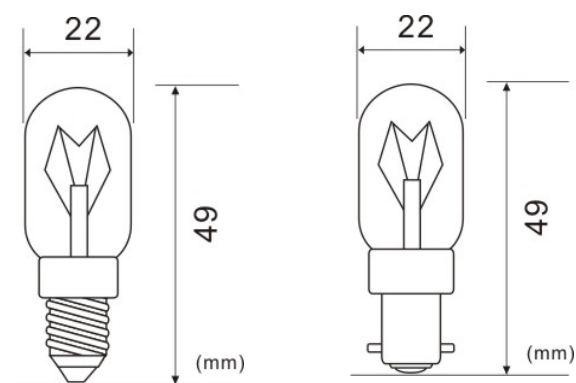

Photometric Information

2700K

