



Incandescent PYGMY bulb ST26x58 15W B22 ,B15,E14 Cap



Product Overview

Main voltage incandescent lamps operate direct from the mains, without the need for a transformer, and can be dimmed: making them quick and easy to install, simple to operate and lowering installation and user costs.

Features

- Excellent color rendering and consistency
- Reliable construction

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in application where voltage is unable
- This is a glass product, handle with care

Specifications – B22,B15,E14 Cap

SKU	S1053	S1055	S1057
Lamp	Cap B22	Cap B15	Cap E14
Nominal Power (W)	15W	15W	15W
Voltage	220-240Vac 50Hz	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Luminous Flux (lm)	60	60	60
CCT (K)	2700K warm White	2700K warm White	2700K warm White
Nominal Lifetime (h)	1000	1000	1000
Dimmable	Yes	Yes	Yes
Switching Cycles	8000	8000	8000
Warm-up time to 60% (S)	instant	instant	instant
Length (mm)	58	58	58
Diameter (mm)	26	26	26
Mercury (mg)	0	0	0
Clean-up instructions	See website	See website	See website
Retrofit Yes			
Equivalent Wattage (W)	15	15	15
Rated Power (W)	4.0	4.0	4.0
Rated Luminous Flux (lm)	60	60	60
Rated Lifetime (h)	1000	1000	1000
Power Factor	1	1	1
Rated Peak Candelas (cd)			
Lumen Maintenance Factor at			
Nominal Lifetime	1000	1000	1000
CRI	>80	>80	>80
Start Time (s)	instant	instant	instant
Ambient Temperature Range (°C)	-20 to 40	-20 to 40	-20 to 40

Energy Label – B22,B15,E14 Cap


Energy Class	E	E	E
Energy Consumption (kWh/1000h)	15.00 (15)*	15.00 (15)*	15.00 (15)*

* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference

Product Markings – B22,B15,E14 Cap

Voltage	220-240Vac 50Hz	220-240Vac 50Hz	220-240Vac 50Hz
Nominal Power (W)	15	15	15
Current (mA)			
CE Mark	Yes	Yes	Yes
WEEE Mark	Yes	Yes	Yes
Batch Code	Yes	Yes	Yes

Dimensions

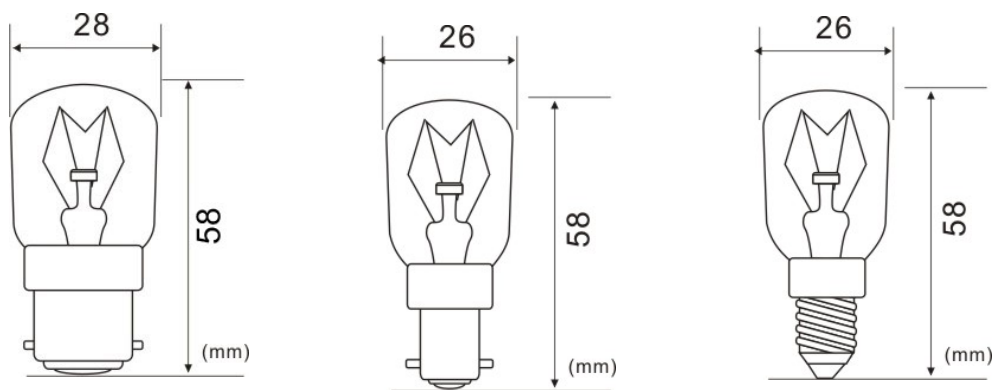

Photometric Information

2700K

